


SPECIFICATIONS

Light Source	LED
Spectrum	45"X43"
Light Output PPF	1820 $\mu\text{mol/s}$
Efficacy	2.8 $\mu\text{mol/J}$
AC Input Power	650W
AC Input Voltage	100-277V AC,50/60Hz
Light Distribution	120°
Mounting Height	6"-12"(15.2-30.5cm)Above Canopy
Thermal Management	Passive
Max. Ambient Temperature	113°F / 45°C
Dimming	0-10V
Total Harmonic Distortion (THD)	< 15%
Lifetime	L90: > 50,000hrs
IP Rating	IP65
Certifications	UL 8800,UL 1598 Wet Location
Warranty	5 Year Standard Warranty

Product is Wattage adjustable product. Can be adjusted from 200W to 650W
 NOMINAL ELECTRICAL AC INPUT*

AC VOLTAGE	120V	240V	277V
AC Current	5.5A	2.9A	2.5A
AC Power	660W	650W	650W
Power Factor	0.98	0.95	0.92

SPECTRA

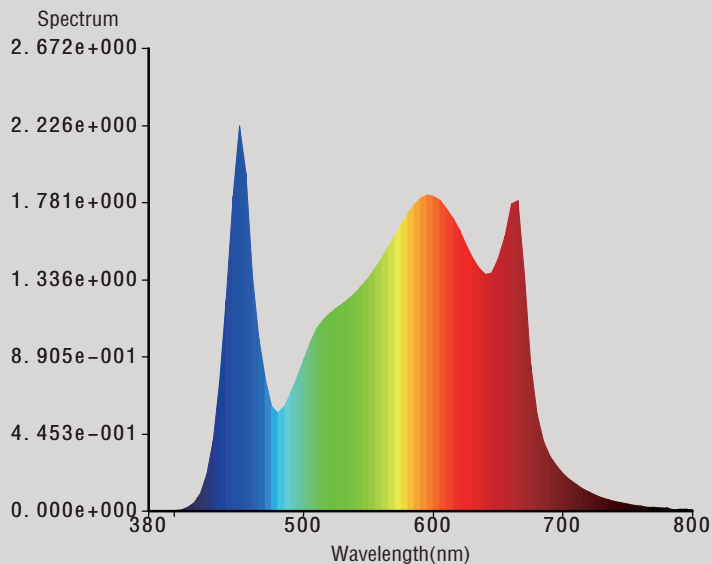

DIMENSIONS

Part	Length	Width	Height	Weight
Light Fixture	45" 1130mm	43" 1078mm	4.5" 114.5mm	22lbs 10kg

[TOP VIEW]

