

SPECIFICATIONS


Light Source	LED
Spectrum	30" x21"
Light Output PPF	580 $\mu\text{mol/s}$
Efficacy	2.9 $\mu\text{mol/J}$
AC Input Power	200W
AC Input Voltage	100-277V AC,50/60Hz
Light Distribution	120°
Mounting Height	6" -12" (15.2-30.5cm)Above Canopy
Thermal Management	Passive
Max. Ambient Temperature	113°F / 45°C
Dimming	0-10 V
Total Harmonic Distortion (THD)	< 15%
Lifetime	L90: > 50,000hrs
IP Rating	IP65
Certifications	UL 8800,UL 1598 Wet Location
Warranty	5 Year Standard Warranty

Product is Wattage adjustable product, can be adjusted from 10W to 200W

NOMINAL ELECTRICAL AC INPUT*

AC VOLTAGE	120V	240V	277V
AC Current	1.67A	3.33A	0.72A
AC Power	200W	200W	200W
Power Factor	0.98	0.95	0.92

SPECTRA

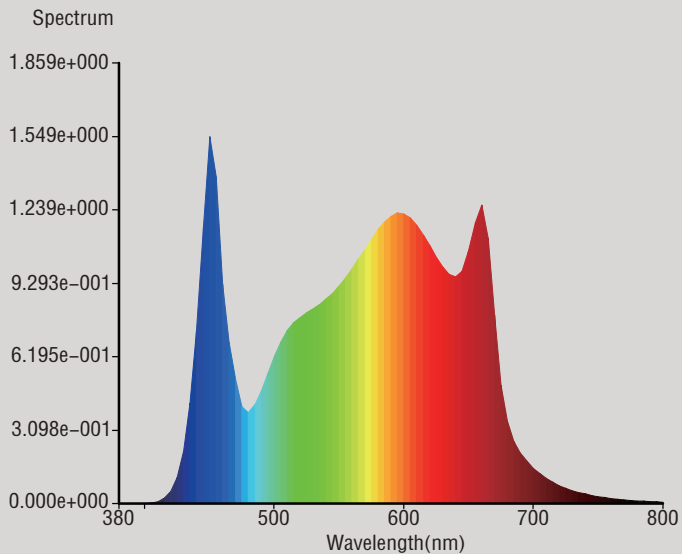

DIMENSIONS

Part	Length	Width	Height	Weight
Light Fixture	30" 761.8mm	21" 532.4mm	2" 50mm	13.2lbs 6 kg

[TOP VIEW]

