

# Inter Canopy Light



## SPECIFICATIONS

|                                 |                                 |
|---------------------------------|---------------------------------|
| Light Source                    | LED                             |
| Light Output PPF                | 310 $\mu\text{mol/s}$           |
| Efficacy                        | 2.7/3.1 $\mu\text{mol/J}$       |
| AC Input Power                  | 50W/100W                        |
| AC Input Voltage                | 120V-277V AC,50/60Hz            |
| Light Distribution              | 270°                            |
| Mounting Height                 | 6"-12"(15.2-30.5cm)Above Canopy |
| Thermal Management              | Passive                         |
| Max. Ambient Temperature        | 0°C / 35°C                      |
| Total Harmonic Distortion (THD) | < 20%                           |
| Lifetime                        | L90: > 50,000hrs                |
| IP Rating                       | IP66                            |
| Certifications                  | UL 8800,UL 1598 Wet Location    |
| Warranty                        | 5 Year Standard Warranty        |

## NOMINAL ELECTRICAL AC INPUT\*

| AC VOLTAGE   | 120V       | 240V       | 277V       |
|--------------|------------|------------|------------|
| AC Current   | 0.42/0.83A | 0.21/0.42A | 0.18/0.36A |
| AC Power     | 50/100W    | 50/100W    | 50/100W    |
| Power Factor | 0.9        | 0.9        | 0.9        |

## SPECTRA

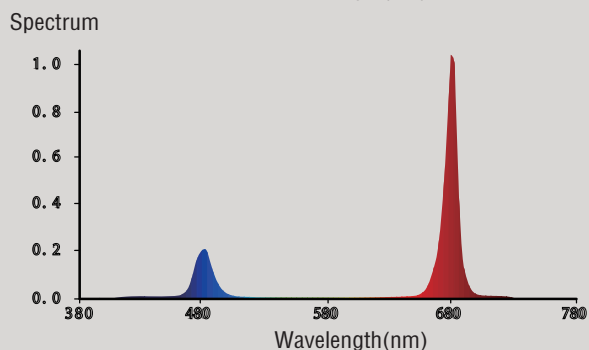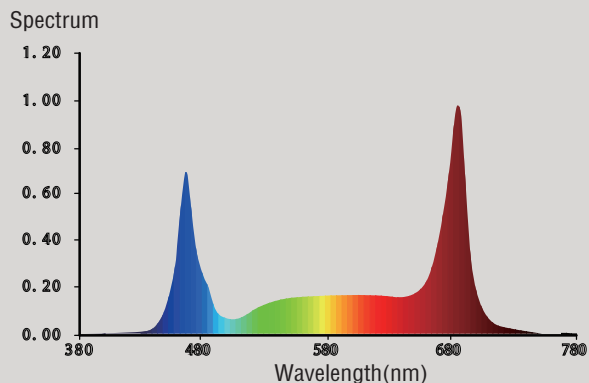

## DIMENSIONS

| Part          | Length            | Width         | Height        | Weight              |
|---------------|-------------------|---------------|---------------|---------------------|
| Light Fixture | 48"<br>1225 mm    | 2.5"<br>70 mm | 3.5"<br>90 mm | 4.02 lbs<br>1.82 kg |
| Light Fixture | 95.47"<br>2425 mm | 2.5"<br>70 mm | 3.5"<br>90 mm | 7.78 lbs<br>3.53 kg |

[ TOP VIEW ]

