


## SPECIFICATIONS

Light Source	LED
Spectrum	45"X43"
Light Output PPF	1820 $\mu\text{mol/s}$
Efficacy	2.8 $\mu\text{mol/J}$
AC Input Power	650W
AC Input Voltage	100-277V AC,50/60Hz
Light Distribution	120°
Mounting Height	6"-12"(15.2-30.5cm)Above Canopy
Thermal Management	Passive
Max. Ambient Temperature	113°F / 45°C
Dimming	0-10V
Total Harmonic Distortion (THD)	< 15%
Lifetime	L90: > 50,000hrs
IP Rating	IP65
Certifications	UL 8800,UL 1598 Wet Location
Warranty	5 Year Standard Warranty

Product is Wattage adjustable product. Can be adjusted from 200W to 650W  
 NOMINAL ELECTRICAL AC INPUT\*

AC VOLTAGE	120V	240V	277V
AC Current	5.5A	2.9A	2.5A
AC Power	660W	650W	650W
Power Factor	0.98	0.95	0.92

## SPECTRA

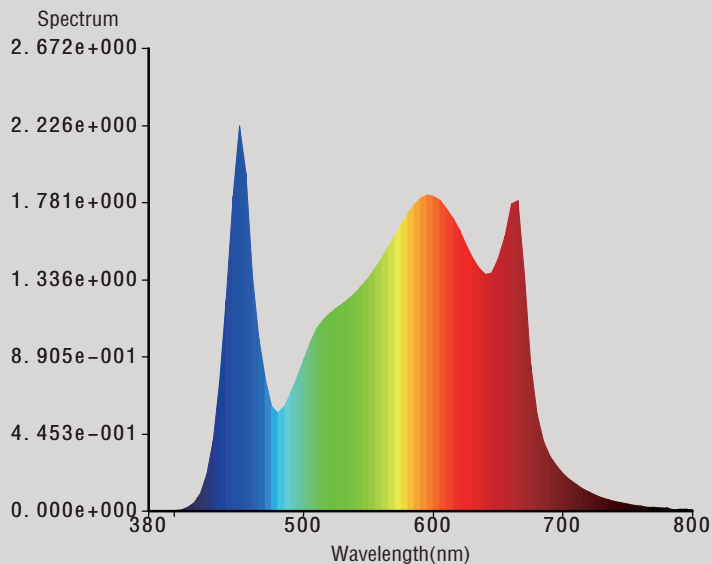

## DIMENSIONS

Part	Length	Width	Height	Weight
Light Fixture	45" 1130mm	43" 1078mm	4.5" 114.5mm	22lbs 10kg

[ TOP VIEW ]

